



Rec'd PCT/PTO 05 JAN 2005
PCT/SE 03 / 00909



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 08 JUL 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

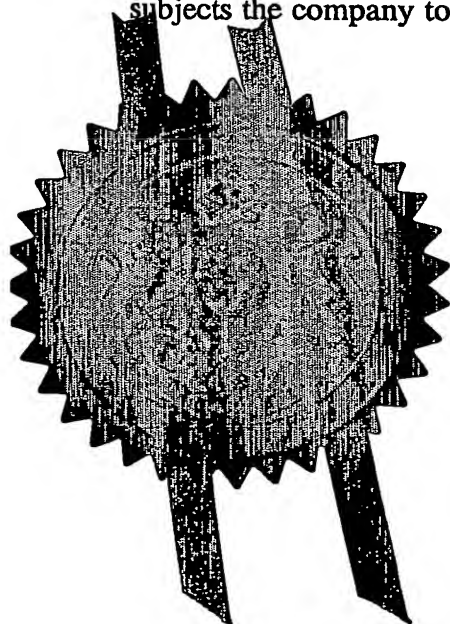

Signed *AmBrenner*

Dated 21 May 2003

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)



1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

12 JUL 2002

1. Your reference

P16560GB-NHF/SJP/mm

2. Patent application number

(The Patent Office will fill in this part)

0216211.3

15JUL02 E733038-5 000389
P01/7700 0.00-0216211.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Autoliv Development AB
S-447 83 Vargarda
SWEDEN

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

SWEDEN

321018007

4. Title of the invention

IMPROVEMENTS IN OR RELATING TO AN AIR-BAG

5. Name of your agent (if you have one)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Forrester House
52 Bounds Green Road
London
N11 2EY

Patents ADP number (if you know it)

133001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9 ✓
Claim(s)	2 ✓
Abstract	1 ✓
Drawing(s)	3 + 3

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

YES - FOUR ✓

Request for preliminary examination and search (*Patents Form 9/77*)

YES - ONE ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Forrester Ketley & Co.

Date

11 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

NIGEL H. FRANKLAND
(020) 8889 6622

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PATENTS ACT 1977

Agents Ref: P16560GB-NHF/SJP/mm

IMPROVEMENTS IN OR RELATING TO AN AIR-BAG

THE PRESENT INVENTION relates to an air-bag, and more particularly relates to an air-bag arrangement comprising a gas-supply duct.

It has been proposed previously to provide various forms of air-bag with a substantially rigid gas-supply duct configured to direct a flow of gas from an inflator or gas generator through specific regions of the air-bag which are to be inflated.

For example, various designs of "inflatable curtain" have been proposed. Such an inflatable curtain is an air-bag which is initially stored within the roof lining of a motor vehicle immediately above the door openings, the air-bag inflating, in response to a signal from an appropriate sensor, to form a "curtain" lying adjacent a side window of the vehicle. Frequently, an air-bag of this type comprises two discrete chambers for inflation, one chamber being configured to lie adjacent the front side-window of the vehicle, and the other chamber being configured to lie adjacent the rear-side window of the vehicle upon inflation of the air-bag. In order to use a single inflator or gas generator to inflate both discrete chambers of the air-bag, it is convenient to arrange the inflator or gas generator in the region of the "B-pillar" of the motor vehicle structure, i.e. the pillar extending vertically upwardly between the front and rear side windows of the vehicle.

As will therefore be appreciated, in order to ensure proper inflation of both of the discrete chambers of the above-mentioned inflatable curtain, gas generated by the single gas generator must be directed towards each discrete chamber. However, because an inflatable curtain-type air-bag must be inflated in a very short period of time if it is to be of value in a side impact situation, the gas generator must produce a very large volume of gas in a very short period of time. The resultant flow of gas is very aggressive and can damage the inflatable curtain if not carefully directed into the interior of the inflatable curtain. It is known to provide a substantially rigid gas-supply duct, extending from the single gas generator, in order to direct the flow of gas into the interior of the inflatable curtain.

DE 20016717U1 discloses an arrangement comprising a pair of divergent gas-supply ducts, each configured to direct gas from a common gas generator towards a respective region of the inflatable curtain. However, the provision of two gas supply ducts adds complexity and expense to the arrangement.

DE 19850448A discloses a single gas supply duct configured to provide a flow of gas along two flow paths, into separate air-bags, the two flow paths being substantially perpendicular to one another.

The present invention seeks to provide an improved air-bag arrangement.

According to the present invention, there is provided an air-bag arrangement comprising a single inflatable element and a gas generator configured to inflate the inflatable element, the inflatable element defining at

least two chambers for inflation by gas from the gas generator, the air-bag arrangement further comprising a gas-supply duct having an end-outlet aperture formed through an end-wall of the gas-supply duct so as to have a diameter smaller than the bore of the gas-supply duct; and at least one side-outlet aperture formed through a side-wall of the gas-supply duct at a position substantially adjacent the end-outlet aperture, the or each side-outlet aperture being configured to direct gas out of the gas-supply duct in a direction substantially orthogonal to the direction of gas directed through the end-aperture, wherein the gas-supply duct is arranged to direct gas from the gas generator to one of said two chambers through the end-outlet aperture, and from the gas generator to the other of said two chambers through said at least one side-outlet aperture.

Preferably, the gas-supply duct comprises a plurality of said side-outlet apertures formed in the side-wall.

Advantageously, each of said plurality of side-outlet apertures is arranged to direct gas out of the gas-supply duct in a direction non-parallel with the direction of gas directed through the or each other said side-outlet aperture.

Conveniently, said inflatable element defines a gas-flow passage interconnecting said two chambers, and wherein at least one of said outlet apertures is arranged to direct gas along said flow-passage.

Preferably, the or each outlet aperture arranged to direct gas along said flow passage is arranged to direct said gas in a direction angle at approximately 45° to the axis of said flow passage.

Advantageously, the inflatable element is in the form of an inflatable curtain.

Conveniently, the gas-supply duct has a curved or bent configuration.

Preferably, the gas-supply duct has two linear regions, the axis of one said linear region making an angle of approximately 45° to the axis of the other linear region.

So that the invention may be more readily understood, and so that further features thereof may be appreciated, the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

FIGURE 1 is a side view of an air-bag arrangement in accordance with the present invention, illustrating the arrangement fully inflated, to provide an inflatable curtain within a motor vehicle;

FIGURE 2 is an enlarged side view of the air-bag arrangement of the present invention, illustrating the flow of gas during inflation;

FIGURE 3 is an enlarged perspective view of part of the air-bag arrangement illustrated in Figure 2; and

FIGURE 4 is a view corresponding to part of Figure 2, illustrating an alternative embodiment of the invention.

Referring initially to Figure 1 of the accompanying drawings, an air-bag arrangement 1 is illustrated in the form of an inflatable curtain for use in a motor vehicle. The air-bag arrangement comprises an inflatable element 2 which is secured along its uppermost peripheral edge 3 to the roof structure 4 of the motor vehicle. The inflatable element 2 comprises two discrete chambers

5,6. In the arrangement illustrated in Figure 1, the right-hand chamber 5 is configured for inflation so as to provide a curtain lying adjacent the front side-window of the vehicle, whilst the left-hand chamber 6 is configured for inflation to form a curtain lying adjacent the rear side-window of the vehicle. The two discrete chambers 5,6 are interconnected by an elongate flow passage 7 running parallel with and adjacent to the roof structure 4 of the motor vehicle.

In a manner known *per se*, the inflatable element 2 may be formed from two sheets of fabric, which are interconnected by seams, or, alternatively, by using a one-piece weaving technique in which two sheets of fabric are woven simultaneously, the sheets of fabric, in selected regions, being co-woven to form, in those selected regions, a single sheet of fabric. It will therefore be appreciated that each discrete chamber 5,6 is defined between said two sheets of fabric. As illustrated in Figure 1, the interior volume of each discrete chamber 5, 6 is further sub-divided into a plurality of inflatable zones 8. The plurality of inflatable zones 8 may, for example, be defined by lines 9 of stitching between the two layers of fabric forming the inflatable element 2. Alternatively, the discrete inflatable zones 8 could be defined by co-woven regions of the fabric.

An inflator or gas generator 10 is provided, the inflatable gas generator 10 being located within the roof lining 4 of the motor vehicle. A gas-supply duct 11 extends from the gas generator 10, through a curved fabric inlet sleeve 12 of the inflatable element 2, and terminates at a position 13 located inside the interior volume of the inflatable element 2. As will be described in more detail, the gas supply duct 11 is configured to direct a flow of gas 14, from the gas generator 10 towards and into the forwardmost chamber 5, and also to direct a separate flow of gas 15 from the gas generator 10 towards the rearward chamber 6.

As illustrated more clearly in Figures 2 and 3, the gas supply duct 11 takes the form of a generally elongate rigid tube having a slightly bent or curved configuration so as to define a first substantially linear region 16 arranged to extend generally parallel to the axis of the flow passage 7, and a second substantially linear region 17 angled at approximately 45° to the first substantially linear region 16. Therefore, it will be seen from Figures 1 and 2, that the gas supply duct 11 is configured to extend away from the gas generator 10, within the roof lining structure of the motor vehicle, and then to turn so as to extend downwardly into the interior volume of the inflatable element 2.

The end 13 of the gas-supply duct 11 is partially closed by an end wall 18. However, the end wall 18 is provided with an outlet aperture 19 therethrough, to permit the outflow of gas produced by the gas generator 10. Additionally, the side wall of the gas-supply duct, in the second linear region 17 thereof, is provided with a further outlet aperture 20, the further aperture outlet 20 again being arranged to allow the outflow of gas from the gas-supply duct 11. The further outlet aperture 20 is arranged to be substantially adjacent the end wall 18 and its associated outlet aperture 19.

The dimensions of the outlet aperture 19 formed in the end wall 18 of the gas-supply duct 11, are carefully selected so as to allow flow of gas therethrough, whilst also providing a throttling effect within the second linear region 17 of the gas supply duct 11. Thus, as gas generated by the gas generator 10 passes along the gas-supply duct 11, some of the gas generated will be allowed to exit the gas-supply duct 11 through the end aperture 19, but also a turbulent flow of gas will be triggered inside the end region of the gas-supply duct 11, which will ensure that a second flow of gas also exits the gas-

supply duct 11, through the further outlet aperture 20 located in the side wall of the gas-supply duct 11.

As illustrated in Figure 2, the end 13 of the gas-supply duct 11 enters the interior volume of the inflatable element 2 in a region generally above the junction between the gas flow passage 7 and the right-hand chamber 5. The flow of gas 14 exiting the end outlet aperture 19 is therefore directed towards the right-hand inflatable chamber 5, whilst the flow of gas 15 exiting the side outlet aperture 20, is directed in an orthogonal direction, into the flow passage 7 to be directed by the flow passage 7 towards the left-hand inflatable chamber 6. It will therefore be seen that the single gas-supply duct 11, serves to direct gas in a first direction towards the right-hand inflatable chamber, and in a second, substantially orthogonal direction, towards the left-hand inflatable chamber 6.

In the configuration illustrated in Figure 2, the gas-supply duct 11 is configured to direct the flow of gas 15 exiting through the side outlet aperture 20, in a direction at approximately 45° to the longitudinal axis of the flow passage 7. It will therefore be understood that the gas-supply duct 11 has been carefully configured so that neither the flow of gas 14 exiting through the end outlet aperture 19, nor the gas flow 15 exiting through the side aperture 20 impinges substantially perpendicularly on any part of the structure of the inflatable element 2, especially the peripheral seam of the inflatable element. This avoids the gas flow potentially damaging the structure of the inflatable element 2.

The above-described embodiment of the present invention has been found to be particularly advantageous because, as the second substantially linear region 17 of the gas-supply duct 11 is angled at only approximately 45° to the first substantially linear region 16, then the gas-supply duct 11 does not

extend substantially into the inflatable element 2. As will clearly be seen from Figure 2, this arrangement provides the desired directional flow of gas, with the end 13 of the gas-supply duct 11 located near to the periphery of the inflatable element 2. This is particularly advantageous because it allows the inflatable element 2 to be folded up into a relatively thin package, without the need for the end 13 of the gas-supply duct 11 actually to extend into the folded package. A relatively thin folded inflatable element has clear benefits in allowing a more compact installation, ready for deployment.

Turning now to consider Figure 4, a slightly modified version of the gas-supply duct 11 is illustrated, in which the first and second linear regions 16, 17 of the gas-supply duct 11 are arranged to be substantially perpendicular to one another, thereby to give the gas-supply duct 11 a generally L-shaped configuration. In this arrangement, in addition to the end aperture 19 formed in the end wall 18 of the gas-supply duct 11, two opposed side outlet apertures 20 are provided in the side wall of the gas-supply duct 11. As illustrated in Figure 4, this arrangement therefore provides a flow of gas substantially downwardly into the right-hand inflatable chamber 5, a flow of gas substantially axially along the flow passage 7 towards the left-hand inflatable chamber 6 (not illustrated in Figure 4), and a further flow of gas towards the forwardmost region of the right-hand inflatable chamber 5. However, in this arrangement, in which the gas-supply duct 11 is bent or turned through an angle of approximately 90° , it is essential for the end 13 of the gas-supply duct 11 to be positioned further into the interior of the inflatable element 2, so as to prevent either of the flows of gas exiting through the side apertures 20 from aggressively impinging on the interior structure of the inflatable element at a position too close to the outlet apertures 20.

In each of the above-described embodiments, it should therefore be appreciated that the combination of an end outlet aperture 19 and one or more side outlet apertures 20 formed in the gas-supply duct 11, serves to direct flows of gas out of the gas-supply duct along at least two paths substantially orthogonal to one another, which can therefore be directed towards different parts of the air-bag arrangement. This configuration of the gas-supply duct means that a single gas-supply duct, having a relatively simple construction, can be used to direct flows of gas towards the two discrete chambers 5,6 of the inflatable element 2.

In the present specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS:

1. An air-bag arrangement comprising a single inflatable element and a gas generator configured to inflate the inflatable element, the inflatable element defining at least two chambers for inflation by gas from the gas generator, the air-bag arrangement further comprising a gas-supply duct having an end-outlet aperture formed through an end-wall of the gas-supply duct so as to have a diameter smaller than the bore of the gas-supply duct; and at least one side-outlet aperture formed through a side-wall of the gas-supply duct at a position substantially adjacent the end-outlet aperture, the or each side-outlet aperture being configured to direct gas out of the gas-supply duct in a direction substantially orthogonal to the direction of gas directed through the end-aperture, wherein the gas-supply duct is arranged to direct gas from the gas generator to one of said two chambers through the end-outlet aperture, and from the gas generator to the other of said two chambers through said at least one side-outlet aperture.
2. An air-bag arrangement according to claim 1, wherein the gas-supply duct comprises a plurality of said side-outlet apertures formed in the side-wall.
3. An air-bag arrangement according to claim 2, wherein each of said plurality of side-outlet apertures is arranged to direct gas out of the gas-supply duct in a direction non-parallel with the direction of gas directed through the or each other said side-outlet aperture.
4. An air-bag arrangement according to any preceding claim, wherein said inflatable element defines a gas-flow passage interconnecting said two

chambers, and wherein at least one of said outlet apertures is arranged to direct gas along said flow-passage.

5. An air-bag arrangement according to claim 4, wherein the or each outlet aperture arranged to direct gas along said flow passage is arranged to direct said gas in a direction angled at approximately 45 degrees to the axis of said flow passage.

6. An air-bag arrangement according to any preceding claim, wherein the inflatable element is in the form of an inflatable curtain.

7. An air-bag arrangement according to any preceding claim, wherein the gas-supply duct has a curved or bent configuration.

8. An air-bag arrangement according to claim 7, wherein the gas-supply duct has two linear regions, the axis of one said linear region making an angle of approximately 45 degrees to the axis of the other linear region.

9. An air-bag arrangement substantially as hereinbefore described with reference to and as shown in Figures 1, 2 and 3 of the accompanying drawings.

10. An air-bag arrangement substantially as hereinbefore described with reference to and as shown in Figures 1, 2, modified as shown in Figure 4 of the accompanying drawings.

11. Any novel feature or combination of features disclosed herein.

ABSTRACT**IMPROVEMENTS IN OR RELATING TO AN AIR-BAG**

An air-bag arrangement is disclosed, which preferably takes the form of an inflatable curtain. The arrangement comprises a single inflatable element (2) and a gas generator (10), which is configured to inflate the inflatable element (2). The inflatable element (2) defines at least two inflatable chambers (5,6). A gas-supply duct (11) is provided which has an end outlet aperture (19) formed through an end wall 18 of the gas-supply duct (11) so as to have a diameter smaller than the bore of the gas-supply duct (11). The gas-supply duct (11) also has at least one side outlet aperture (20) formed through the side wall of the gas-supply duct (11) at a position generally adjacent the end outlet aperture (19). The side outlet aperture (20) is configured to direct gas out of the gas-supply duct (11) in a direction substantially orthogonal to the direction of gas directed to the end outlet aperture (19). The gas-supply duct (11) is arranged so that gas exiting through the end outlet aperture (19) is directed to one of said chambers (5), whilst gas exiting through the side outlet aperture (20) is directed to the other chamber (6).

1/3


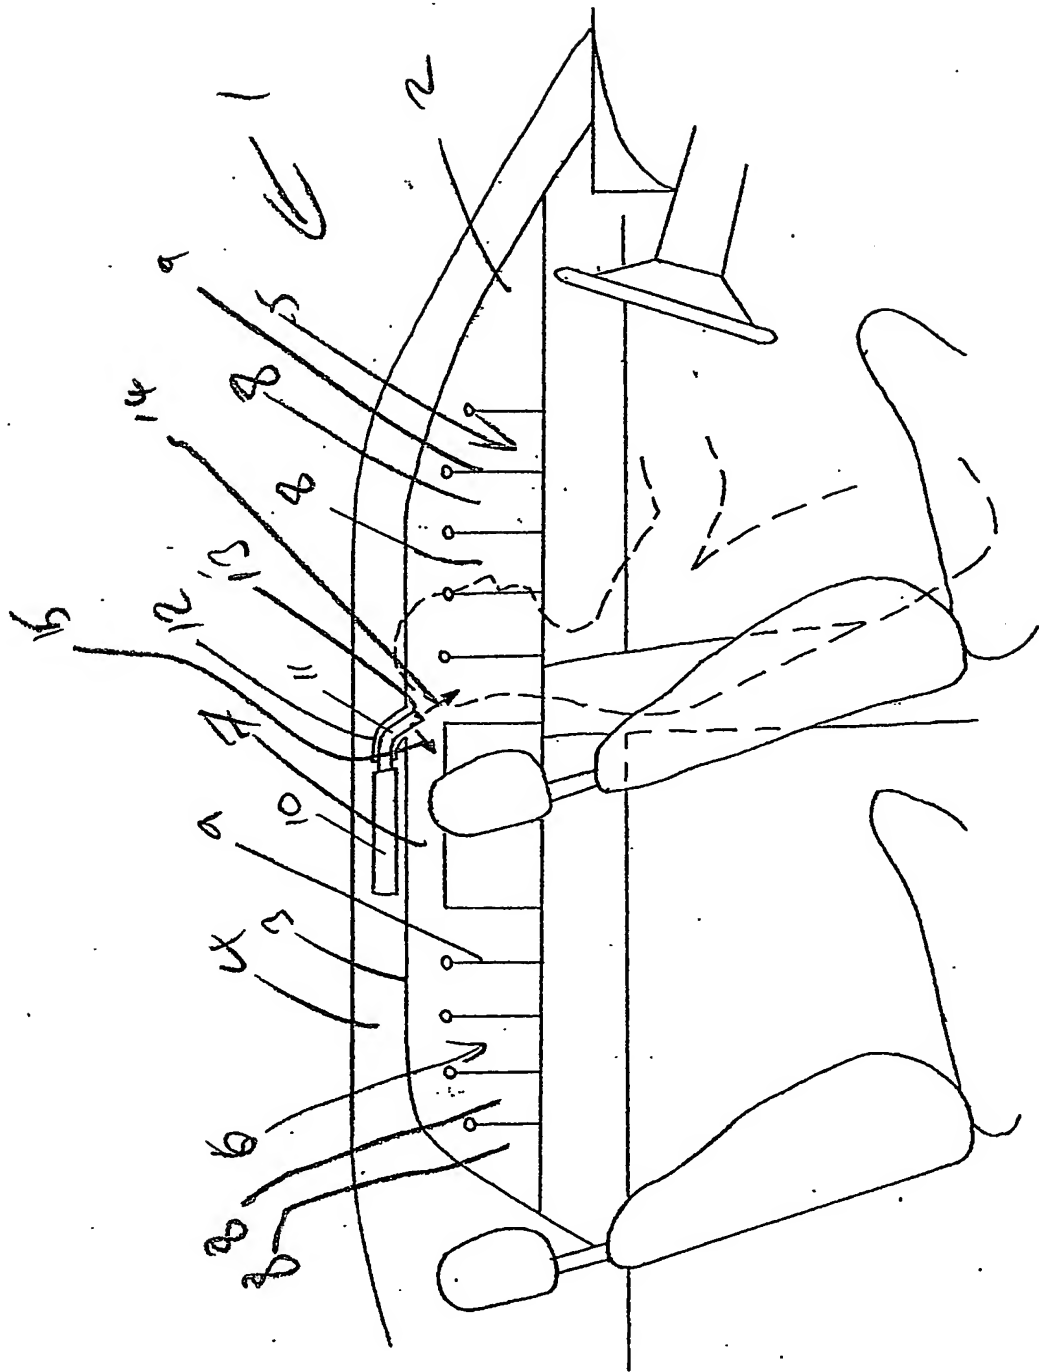


FIG 1

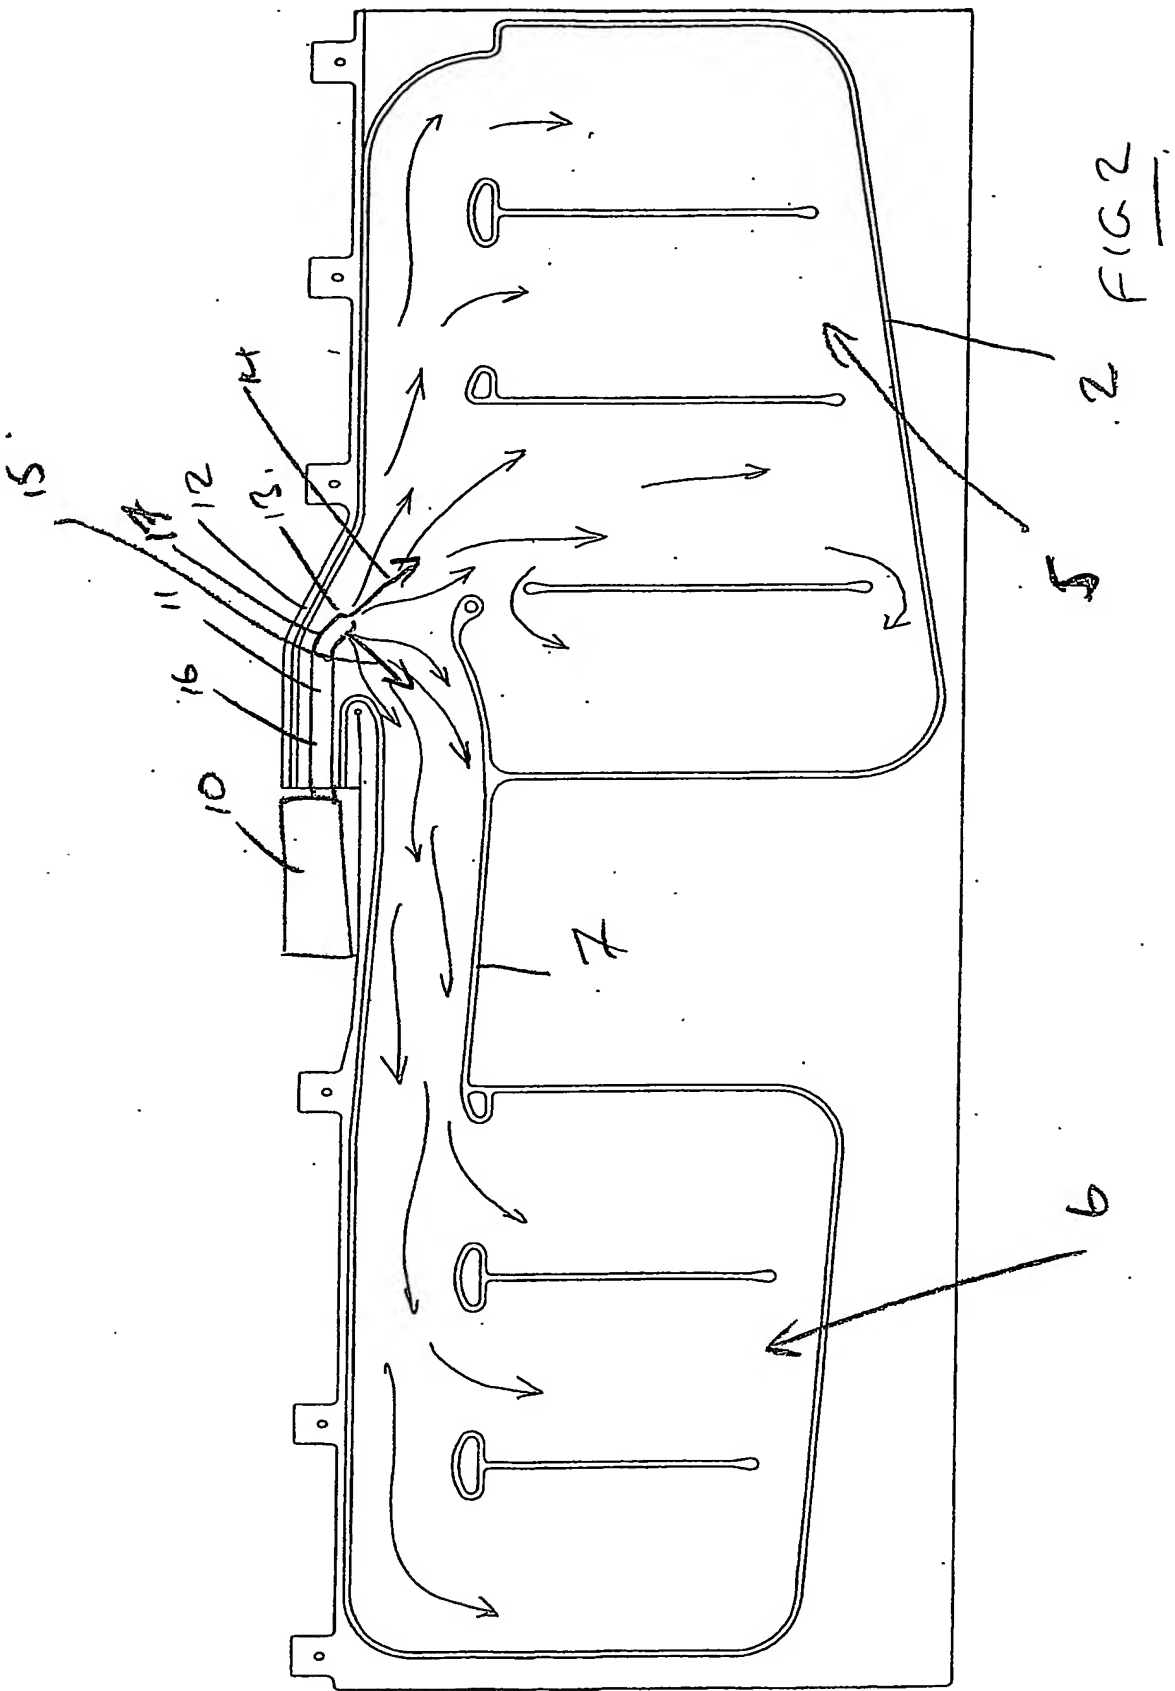

2 FIG 2

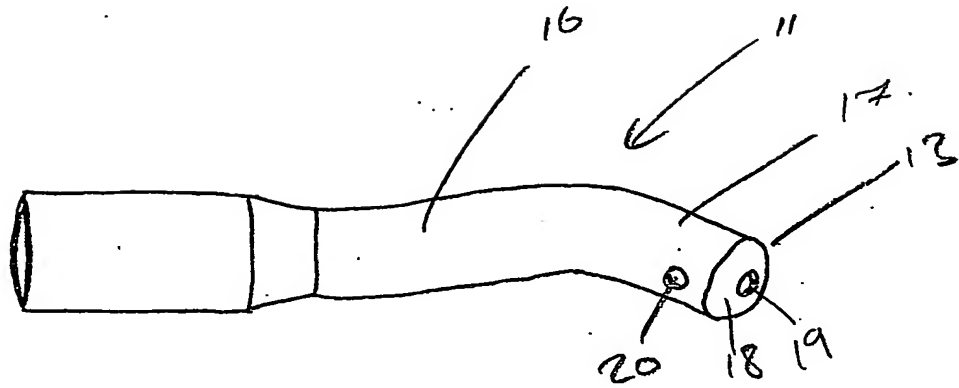
$$3/3$$


FIG 3.

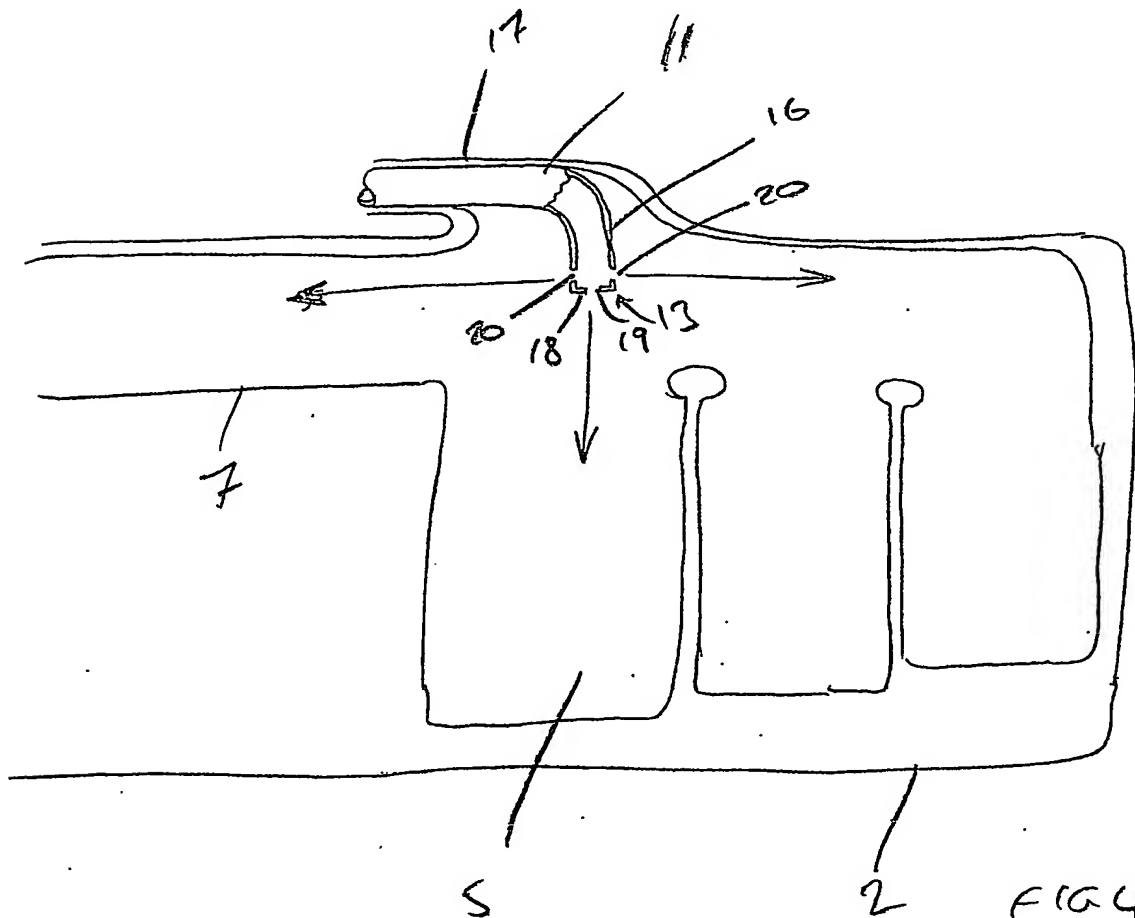


FIG 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKewed/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.